

HIGH SPEED STEELS

Available Product Variants

Long Products*

Plates

*) Presented data refer exclusively to long products. Please observe the detailed explanations at the end of the data sheet (pdf).

Product Description

BÖHLER S290 MICROCLEAN – "The hard stuff"

The unusual alloy point of this bridge material between carbide and high-speed steel gives it a hardness of up to 70 HRC. In addition to its hot hardness and good wear resistance, its compressive strength is one of the most important properties of this powder-metallurgical high-speed steel class.

Process Melting

Powder metallurgy

Properties

- > Toughness & Ductility : good
- > Wear Resistance : very high
- > Compressive strength : very high
- > Edge Stability : very high
- > Grindability : good
- > Hot Hardness (red hardness) : very high

Applications

- > Cold Forming / Coining
- > Powder Pressing
- > Fine Blanking, Stamping, Blanking
- > Special Cutting Tools
- > Gear Cutting, Shaving and Shaping Tools
- > Wear parts

Chemical composition (wt. %)

C	Cr	Mo	V	W	Co
2.0	3.8	2.5	5.1	14.3	11.0

Material characteristics

	Compressive strength	Grindability	Red hardness	Toughness	Wear resistance	Edge Stability
BÖHLER S290 MICROCLEAN®	★★★★★	★	★★★★	★★	★★★★★	★★★★
BÖHLER S390 MICROCLEAN®	★★★★	★★★	★★★★	★★★★	★★★★	★★★★
BÖHLER S393 MICROCLEAN®	★★★★	★★★	★★★★	★★★★	★★★★	★★★★
BÖHLER S590 MICROCLEAN®	★★★★	★★★	★★★★	★★★	★★★	★★★
BÖHLER S592 MICROCLEAN®	★★★★	★★★	★★★★	★★★	★★★	★★★
BÖHLER S690 MICROCLEAN®	★★★	★★★	★★	★★★★★	★★★	★★
BÖHLER S692 MICROCLEAN®	★★★	★★★	★★	★★★★★	★★★	★★
BÖHLER S790 MICROCLEAN®	★★★	★★★	★★	★★★★	★★	★★★
BÖHLER S792 MICROCLEAN®	★★★	★★★	★★	★★★★	★★	★★★
BÖHLER S793 MICROCLEAN®	★★★	★★★	★★★★	★★★	★★★	★★★

Delivery condition

Annealed

Hardness (HB)	max. 350
---------------	----------

Heat treatment


Stress relieving

Temperature	600 to 650 °C 1,112 to 1,202 °F	Slow cooling in furnace. To relieve stresses set up by extensive machining or in tools of intricate shape. After through heating, hold in neutral atmosphere for 1 to 2 hours.
-------------	-----------------------------------	--

Hardening and Tempering

Temperature	1,150 to 1,210 °C 2,102 to 2,210 °F	Salt bath, vacuum Preheating: 1st stage ~ 500 °C (930 °F), 2nd stage ~ 850 °C (1560 °F), 3rd stage ~ 1050 °C (1920 °F) Austenitising: 1150 - 1210 °C (2100 °F - 2210 °F), holding time after complete heating 80 seconds, maximum 150 seconds, to avoid material damage due to overheating. Quenching: oil, warm bath (500 - 550 °C (930 °F - 1020 °F)), gas
Temperature	550 to 580 °C 1,022 to 1,076 °F	Slow heating to tempering temperature immediately after austenitising. Dwell time in the furnace 1 hour per 20 mm material thickness (at least 1 hour) Slow cooling to room temperature between each tempering step 3 tempering cycles recommended Hardness see tempering chart

Continuous cooling CCT curves

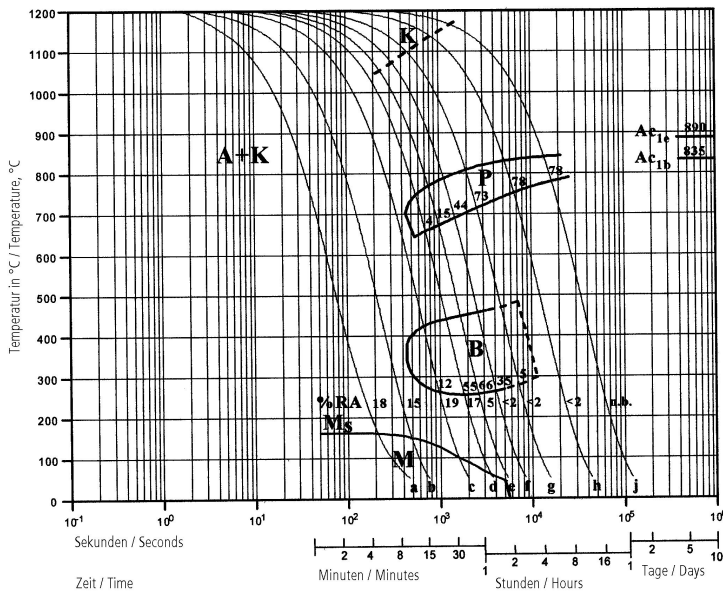


Austenitising temperature: 1210°C (2210°F)
Holding time: 180 seconds

A....Austenite
B....Bainite
K....Carbide
P....Pearlite
M....Martensite
RA...Retained Austenite

Sample	λ	HV10	Sample	λ	HV10
a	0,4	842	f	12,5	562
b	1,1	864	g	23,0	476
c	3,0	737	h	65,0	444
d	5,5	678	j	180,0	418
e	8,0	626			


Quantitative phase diagram

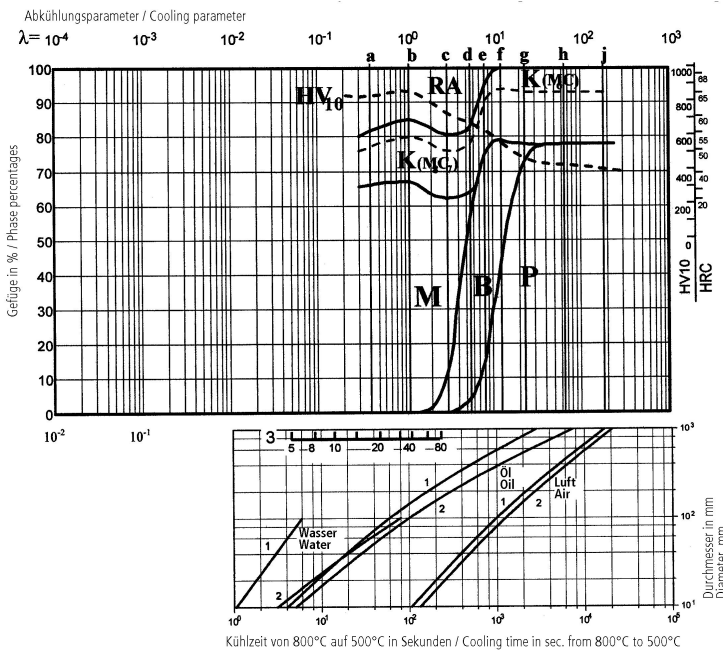

A....Austenite
B....Bainite
K....Carbide
P....Pearlite
M....Martensite
RA...Retained Austenite

1....Edge or Face
2....Core
3....Jominy test: distance from quenched end

Tempering Chart

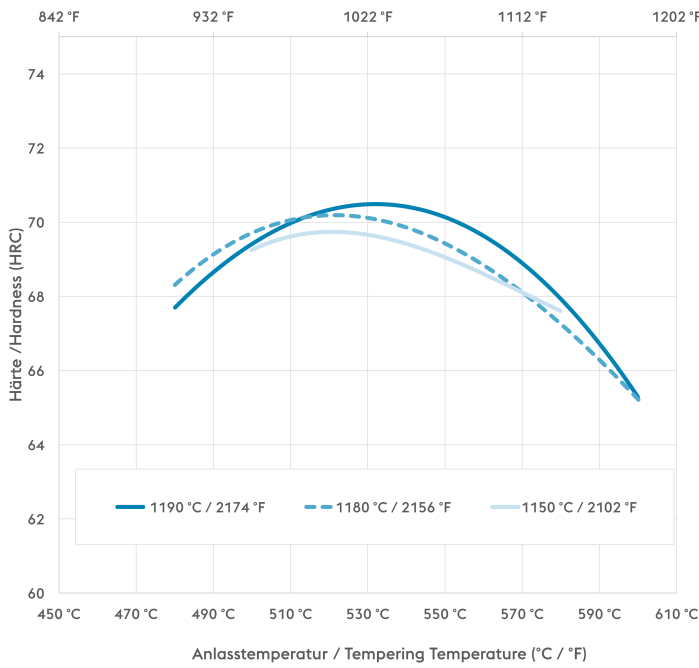

Holdingtime 3x2 hours

Specimensize: square 25mm

Physical Properties

Temperature (°C °F)	20 68
Density (kg/dm ³ lb/in ³)	8.3 0.3
Thermal conductivity (W/(m.K) BTU/ft h °F)	19 10.98
Specific heat (kJ/kg K BTU/lb °F)	0.41 0.0979
Spec. electrical resistance (Ohm.mm ² /m 10 ⁻⁴ Ohm.inch ² /ft)	0.56 2.65
Modulus of elasticity (10 ³ N/mm ² 10 ³ ksi)	242 35.1

Thermal Expansions between 20°C | 68°F and ...

Temperature (°C °F)	100 212	200 392	300 572	400 752	500 932	600 1,112	700 1,292
Thermal expansion (10 ⁻⁶ m/(m.K) 10 ⁻⁶ inch/inch.°F)	9.6 5.3	10 5.6	10.3 5.7	10.6 5.9	10.9 6.1	11.2 6.2	11.6 6.4

Long Products: For additional specifications and technical requirements, please contact our regional voestalpine BÖHLER sales companies.

Sheet & Plates: Product Variant may differ in terms of melting process, technical data, delivery, and surface condition as well as available product dimensions. Please contact voestalpine BÖHLER Bleche GmbH & Co KG.

The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.